

HELPHY 2W-L300

Autodialer for installation in the Machine Room




Dimensions: 182 x 123 x 62 mm
Weight: 654 g

- Up to 32 speaker units
- 2-wire BUS connection
- Built-in battery
- Programmable with SW e-stant

Product	Part number	Description
HELPHY 2W-L300	5HL-702	<p>HELPHY 2W-L300: new-generation dialer in plastic box including:</p> <ul style="list-style-type: none"> - power supply - backup batteries - alarm and reset pushbutton - 230V power supply cable - LEDs signalling operation status, alarm/test call, GSM signal strenght and power supply status. <p>Ready for connection to the PSTN line, expandible over GSM line.</p>

Main Features

- Telephone numbers: programmable, up to 12
- Supported voice terminals: up to 16 2W speaker units, max 32 with passive handsfree terminals
- Digital volume adjustment
- Advanced self-diagnosis system
- Local programming: telephone (DTMF tones), micro SD card, computer with e-stant software and USB serial cable
- Remote programming: app e-stant web (with GSM-RM), telephone (DTMF tones), SMS (with GSM-RM)
- Alarm sending modes: voice, CLI, Esse-ti protocol, P100 protocol, data protocol, SMS (only with GSM-RM)
- Voice prompts: menu with 8 languages
- 1 multifunction programmable relay
- Alarm ending with or without reset codes
- Technological alarms: speaker-unit failure, low battery, battery replacement, power supply failure, 2W speaker unit diagnostics, auxiliary, alarm ending.
- Multi-Sharing function: simultaneous notification of the same alarm to different receivers
- Local or remote testing of any type of alarm
- Test call failure notification as per EN 81-28:2022




Handsfree Speaker Units

- 5HV-300**
2W SPEAKER UNIT - Independent digital speaker unit with microphone and loudspeaker. 2-wire BUS connection.
- 5HV-302**
2W SPEAKER UNIT WITH PUSHBUTTON - Independent digital speaker unit with microphone, loudspeaker and emergency button. 2-wire BUS connection.
- 5HV-324**
2W STAINLESS-STEEL SPEAKER UNIT - Complete with microphone, loudspeaker, double-contact emergency pushbutton, pictograms with LEDs (surface-mount). 2-wire BUS connection.
- 5HV-306**
2W METAL CASE SPEAKER UNIT - Independent digital speaker unit in metal case, with microphone, loudspeaker, emergency button and LEDs.
- 6CV-30022**
MICROPHONE - Soldered on shielded cable L= 3 m.
- 5HV-036**
PASSIVE SPEAKER UNIT - With microphone and loudspeaker.
- 5HV-021**
PASSIVE SPEAKER UNIT WITH CABLE L= 3 m - With microphone, loudspeaker, emergency pushbutton and shielded cable L= 3 m.

Machine Room Terminals

- 4TS-101**
ST 100L ANALOG TELEPHONE WITH DISPLAY
- 5TE-016**
FLY-LIFT ANALOG TELEPHONE
- 5TE-018**
SLIM ANALOG TELEPHONE with keypad on the receiver.

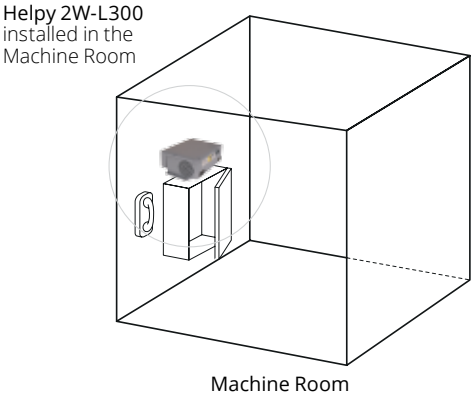

Accessories

- 5HV-170/1**
INDUCTION LOOP - Communication aid device for hearing-impaired. Comes with inductive wire and amplifier unit.
- GATEWAY 4G/3G/2G**
- 5IG-015**
GSM-RM 4G.VOLTE MODULE - 4G LTE/UMTS/GSM module with antenna, LED, magnetic base, mounting bar and connection cable L= 1 m.
- 5IG-010**
GSM-RM 2G MODULE - Quad-band 2G module with antenna, LED, magnetic base, mounting bar and connection cable L= 1 m.
- 5IG-260/S**
4G.VoLTE - 4G/LTE/UMTS/GSM MODULE complete with: backup batteries, adapter, magnet-base antenna. Voice over VoLTE service with fallback on 2G/3G network.
- 5IG-161/S**
GSM500 - GD - 2G Quad-band module complete with: back up batteries, adapter, magnet-base antenna and extension cable L= 2 m.

