

# HELPHY COMPACT-Q

Alarm system for modernization


- Autodialer with speaker unit
- Wall-mounting installation inside the elevator car
- Full range 10-30Vdc power supply
- Programmable with e-stant freeware SW
- Internal Backup Battery (only 5HL-640)
- Lateral Emergency Lights LEDs (only 5HL-640)




Product	Part number	Description
HELPHY COMPACT-Q	5HL-630	<b>HELPHY COMPACT-Q:</b> autodialer in a stainless-steel panel complete with: <ul style="list-style-type: none"><li>- speaker unit</li><li>- emergency-call pushbutton</li><li>- pictograms</li><li>- LEDs signalling alarm sent and alarm received.</li></ul> Connectable over the PSTN line, expandible over the GSM line.
HELPHY COMPACT-Q NB	5HL-632	<b>HELPHY COMPACT-Q NB:</b> autodialer <b>WITHOUT PUSHBUTTON</b>
HELPHY COMPACT-QL	5HL-640	<b>HELPHY COMPACT-QL:</b> autodialer in a stainless-steel panel complete with: <ul style="list-style-type: none"><li>- speaker unit</li><li>- emergency-call pushbutton</li><li>- pictograms</li><li>- LEDs signalling alarm sent and alarm received.</li><li>- Internal Backup battery</li><li>- Lateral Emergency Light (LEDs)</li></ul> Connectable over the PSTN line, expandible over the GSM line.


Main Features

- Telephone numbers: programmable, up to 24
  - Supported voice terminals: 2 passive speaker units
  - Digital volume adjustment
  - Local programming: telephone (DTMF tones), micro SD card, computer with e-stant software and USB serial cable
  - Remote programming: telephone (DTMF tones), software compliant with EPT protocol (DTMF)
  - Alarm sending modes: voice, CLI, Esse-ti protocol, P100, SMS (only with 4G.VoLTE)
  - Voice prompts: menu with 9 languages, customizable with SW e-stant or micro SD card
- Extra inputs for lift remote-monitoring applications
  - Technological alarms: low battery, battery replacement, power supply failure, built-in speaker unit diagnostic, auxiliary, alarm ending, stuck pushbutton, LMS functionality, power supply restore, timer
  - SD Card: extended LOG, firmware update, custom voice prompts and parameters setting.
  - **Version Helpy Compact-QL (only):** comes with an internal backup battery for full operation in case of power supply failure. At the same time 2 lateral additional LEDs work as emergency lights in case of blackout using the internal backup battery. Note: The use of 2 additional LEDs not reduce the compliant with EN 81-28:2022




Handsfree Speaker Units


- 

**5HV-036 PASSIVE SPEAKER UNIT** - with microphone and loudspeaker.
- 


**5HV-021 PASSIVE SPEAKER UNIT WITH CABLE** L = 3 m - With microphone, loudspeaker, emergency pushbutton and shielded cable L = 3 m.
- Machine Room Terminals



**4TS-101 ST 100L ANALOG TELEPHONE WITH DISPLAY**



**5TE-016 FLY-LIFT ANALOG TELEPHONE**



**5TE-018 SLIM ANALOG TELEPHONE** with keypad on the receiver.

Accessories

- 

**5HV-170/1 INDUCTION LOOP** - Communication aid device for hearing-impaired. Comes with inductive wire and amplifier unit.
- 

**5HA-005 ST-POWER 12V** - 12V universal power supply.
- 

**7BA-10003 BACKUP BATTERY 12V 1.3A/H** - to be installed inside the ST-POWER 12V.
- GATEWAY 4G/3G/2G



**5IG-260/S 4G.VoLTE - 4G/LTE/UMTS/GSM MODULE** complete with: backup batteries, adapter, magnet-base antenna. Voice over VoLTE service with fallback on 2G/3G network.




**5IG-161/S GSM500 - GD - 2G Quad-band module** complete with: back up batteries, adapter, magnet-base antenna and extension cable L = 2 m.




HELPHY COMPACT-Q AND HELPHY COMPACT-Q NB  
Dimensions: 147 x 95 x 27 mm

HELPHY COMPACT-QL  
Dimensions: 218 x 100 x 25 mm

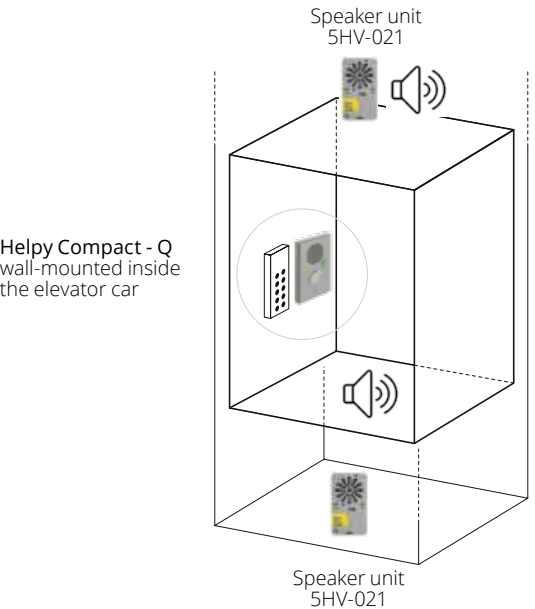

Helpy Compact - Q wall-mounted inside the elevator car

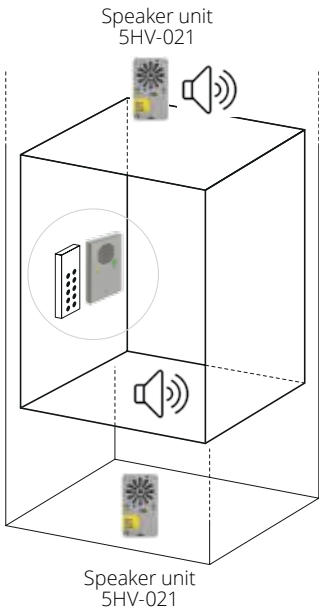

Helpy Compact - NB wall-mounted inside the elevator car